

P200


Barcode Functions Setting Manual

CONTENT


1.Barcode Setting	2
1.1 Host Mode Setting (CDC, HID, BT, COM)	2
1.2. Triger Mode.....	3
1.3. Default Parameter	3
1.4. Decoding Timeout.....	4
1.5. Data Suffix Setting.....	5
1.6. Aiming Light (ON/OFF)	5
1.7 LED light (ON/OFF)	6
1.8. Baud Rate of Virtual Serial Port	8
1.9. Check Bit of Virtual Serial Port.....	9
1.10. Set the Number of Multi-Code	10
1.11. Multi-code Sensitivity Setting	11
1.12. Buzzer Enable Setting.....	12
1.13. Setting the Transfer Rate in HID Mode	12
1.14. Same Barcode Timeout Setting in Non-scanning Mode	13
1.15. Mobile Performance Setting	14
1.16. Aiming Decode Setting.....	14
2.Barcode ON/OFF Setting	15

1.Barcode Setting

Get the SN number—— HYRS_SN

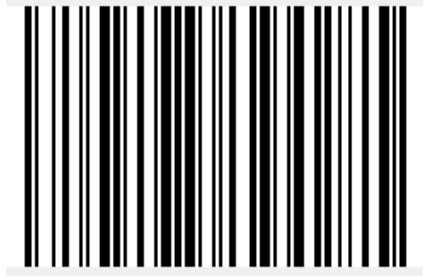


Get the version (by scanning)——HYRS_RE

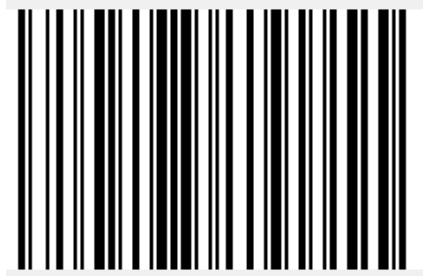

1.1 Host Mode Setting (CDC, HID, BT, COM)




USB Virtual Keyboard

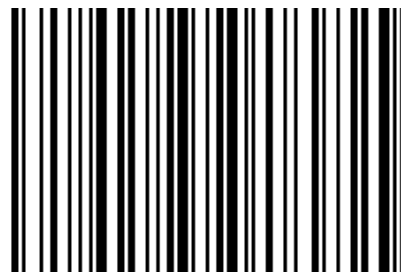

USB Virtual Serial Port




Bluetooth

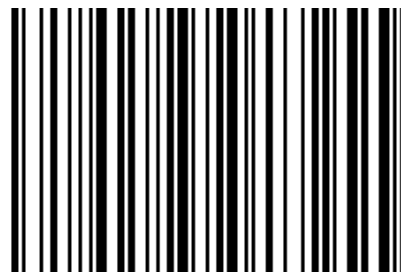

Normal Serial Port

1.2. Triger Mode

(One Scanning, Continuous Scanning and Automatic Sensing)

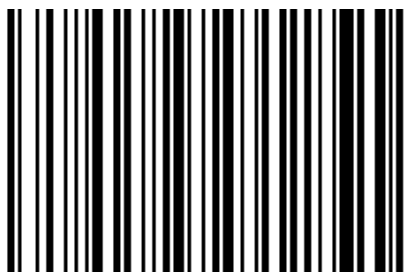

Triger by Button



Continuous Illumination



Automatic Sensing

1.3. Default Parameter

(Restore Factory Setting)



Restore Factory Setting

1.4. Decoding Timeout



0.5 s



0.6 s




1 s



2 s




3 s

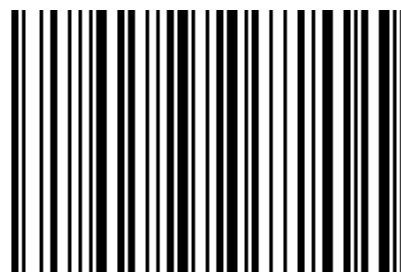

4 s



5 s

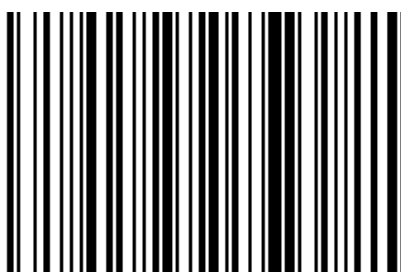


9.9 s


1.5. Data Suffix Setting




LF

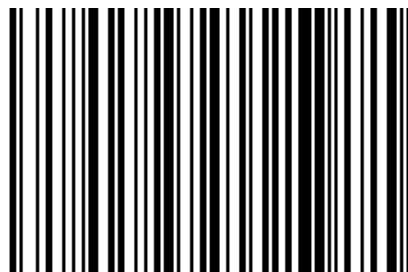

CR

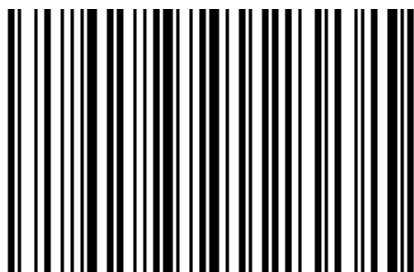

TAB

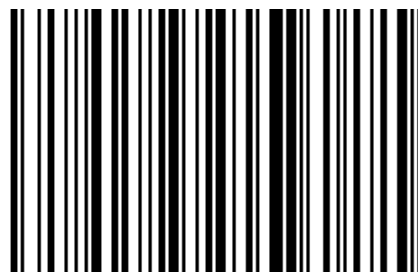


CRLF

1.6. Aiming Light (ON/OFF)




Aiming OFF

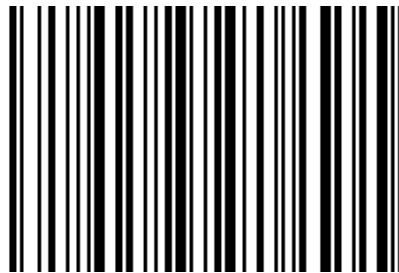


Aiming ON


1.7 LED light (ON/OFF)

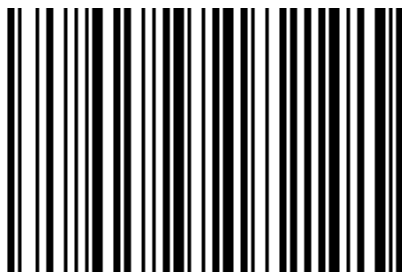


LED light 0 (OFF)

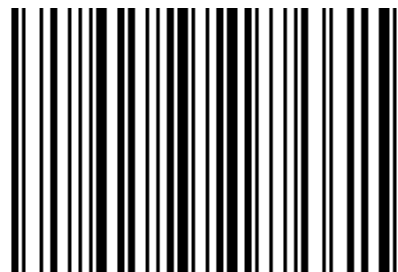

LED light 01

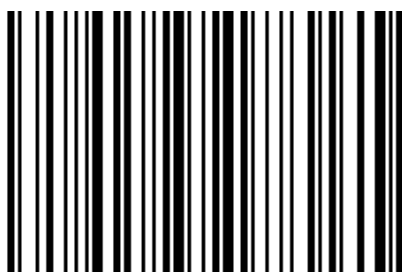

LED light 02

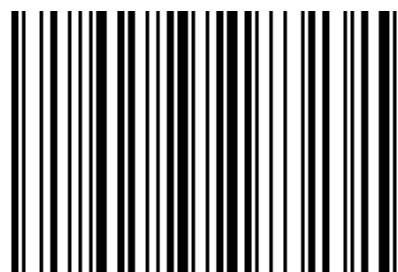

LED light 03




LED light 04




LED light 05




LED light 06

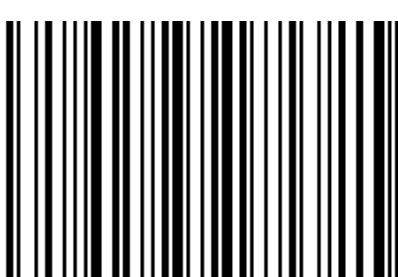

LED light 07

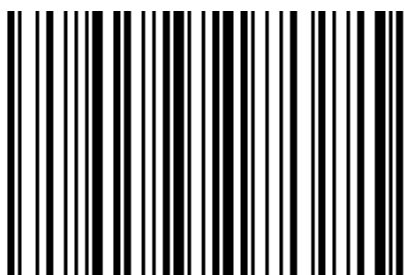

LED light 08

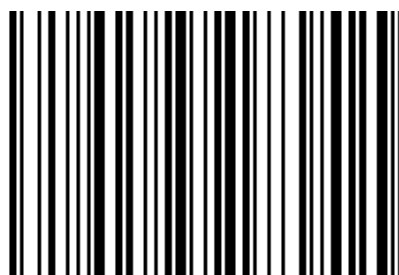


LED light 09




LED light 10

1.8. Baud Rate of Virtual Serial Port

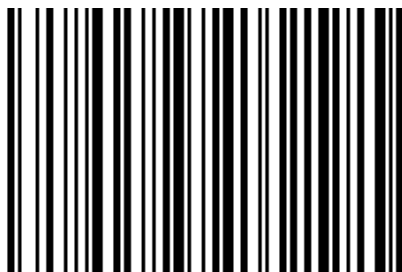

115200

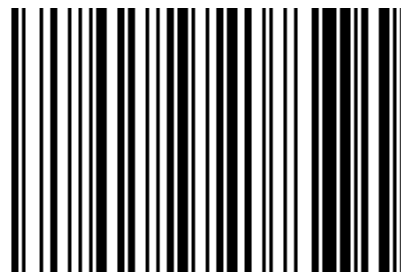

19200




38400



9600



4800

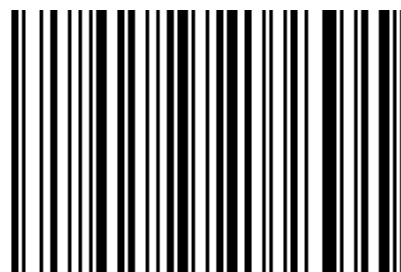

2400



1200

1.9. Check Bit of Virtual Serial Port



None



Odd Check



Even Check

1.10. Set the Number of Multi-Code



None



Multi-Code2



Multi-Code3



Multi-Code4



Multi-Code5



Multi-Code6



Multi-Code7

1.11. Multi-code Sensitivity Setting



+N+S-L

Level 1



+N+S-L

Level 2



+N+S-L

Level 3




+N+S-L

Level 4



+N+S-L

Level 5

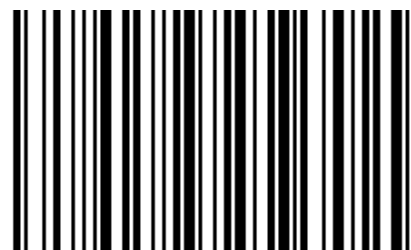

+N+S-L

Level 6



+N+S-L

Level 7



+N+S-L

Level 8



Level 9



Level 10

1.12. Buzzer Enable Setting



Buzzer OFF



Buzzer ON

1.13. Setting the Transfer Rate in HID Mode



Slow



Normal



Fast

1.14. Same Barcode Timeout Setting in Non-scanning Mode



OFF 0s



0.1 s



0.2 s



0.3 s



0.4 s



0.5 s

1.15. Mobile Performance Setting



Normal



Fast



Ultra-fast

1.16. Aiming Decode Setting




OFF




ON


2.Barcode ON/OFF Setting

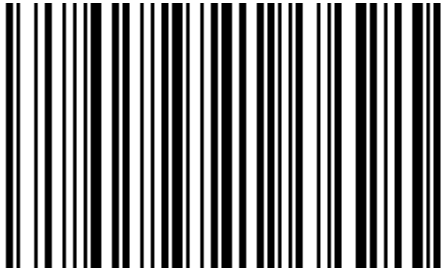


UPC-A ON (Default)

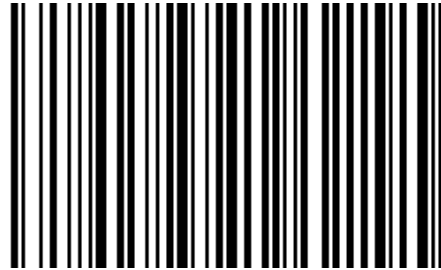


UPC-A OFF

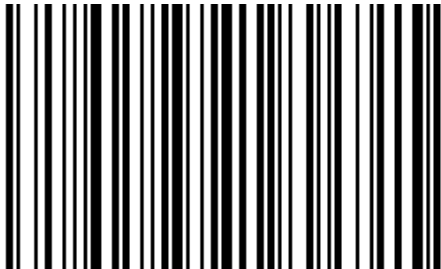

UPC-E ON (Default)

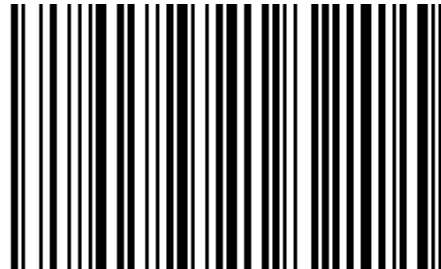


UPC-E OFF

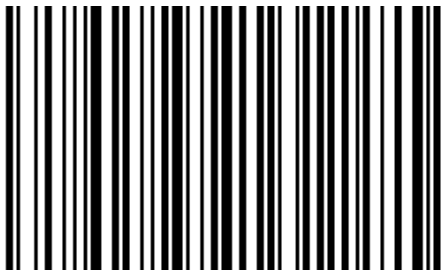

UPC-E1 OFF (Default)




UPC-E1 ON

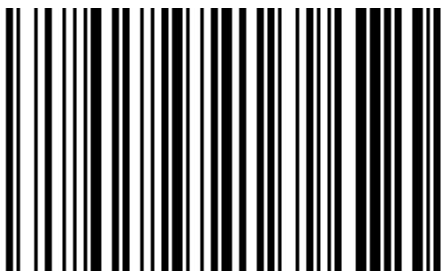

EAN-8/JAN ON (Default)



EAN-8/JAN OFF

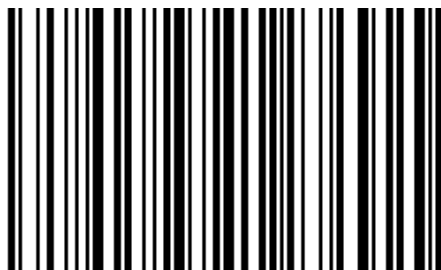


EAN-13/JAN ON (Default)




EAN-13/JAN OFF



Bookland EAN OFF (Default)

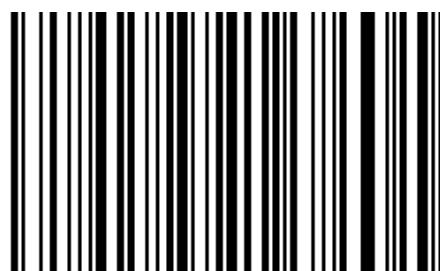


Bookland EAN OFF

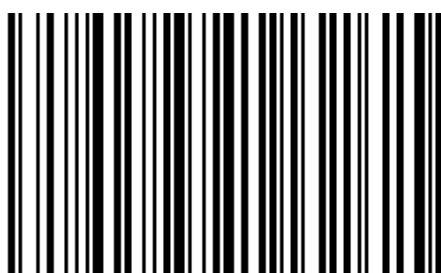

ISSN EAN OFF (Default)




ISSN EAN OFF

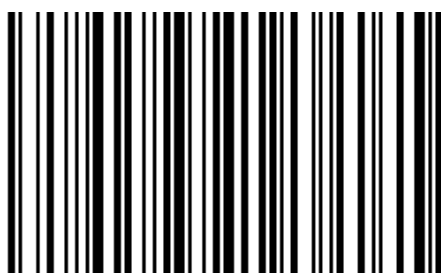

Code 128 ON (Default)



Code 128 OFF

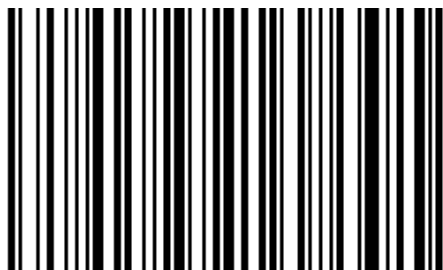

GS1-128 ON (Default)



GS1-128 OFF



ISBT 128 ON (Default)




ISBT 128 OFF



Code 39 ON (Default)




Code 39 OFF

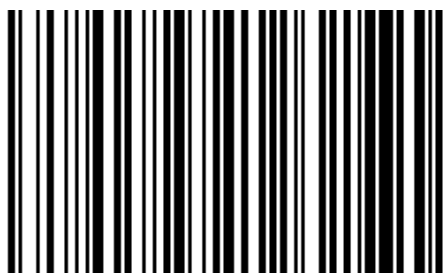


Trioptic Code 39 OFF (Default)



Trioptic Code 39 ON

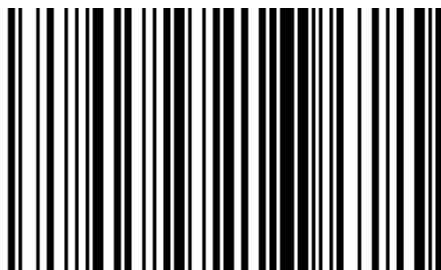

Code 93 ON (Default)

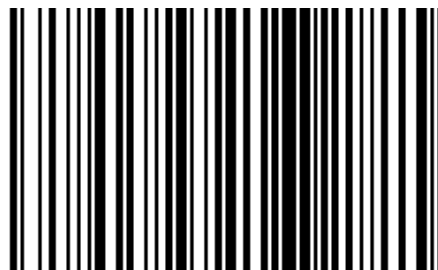


Code 93 OFF




Code 11 OFF (Default)



Code 11 ON

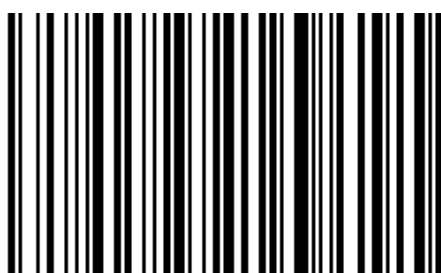

Interleaved 2 of 5 ON (Default)

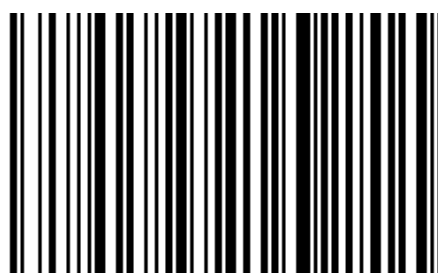


Interleaved 2 of 5 OFF




Discrete 2 of 5 OFF (Default)




Discrete 2 of 5 ON

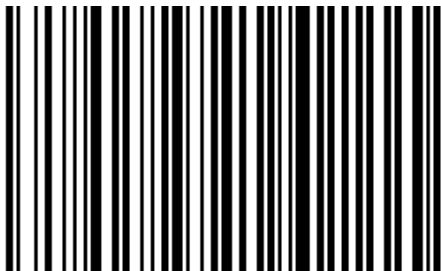

Chinese 2 of 5 OFF (Default)

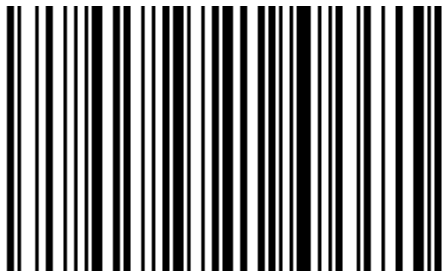


Chinese 2 of 5 ON

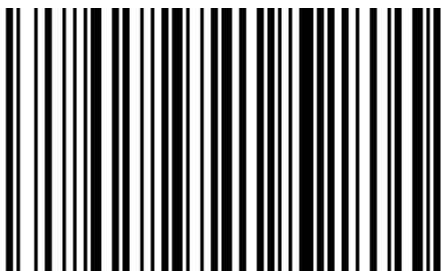

Korean 3 of 5 OFF (Default)




Korean 3 of 5 ON

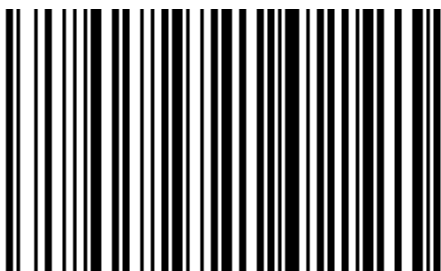

Matrix 2 of 5 OFF (Default)




Matrix 2 of 5 OFF (Default)

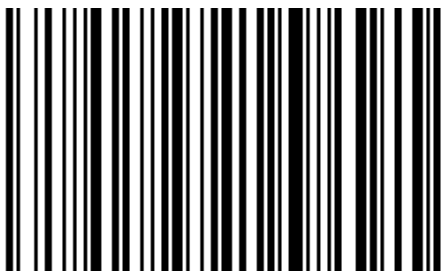


Codabar ON (Default)




Codabar OFF

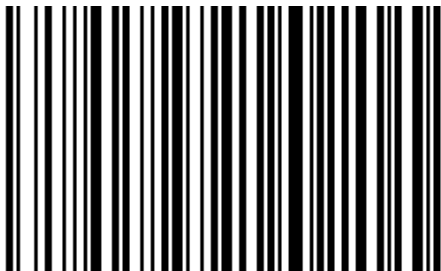


MSI OFF (Default)

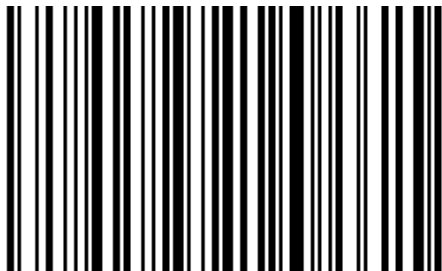


MSI ON

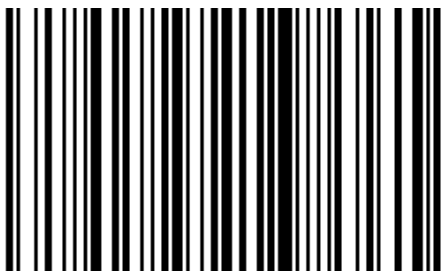

US Postnet ON (Default)

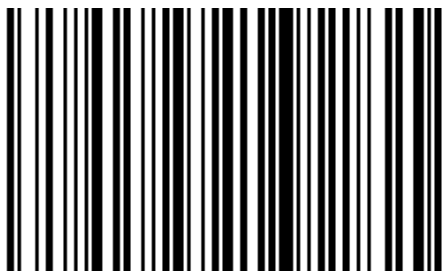


US Postnet ON (Default)

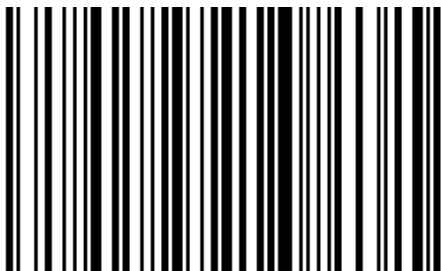


US Planet ON (Default)



US Planet OFF

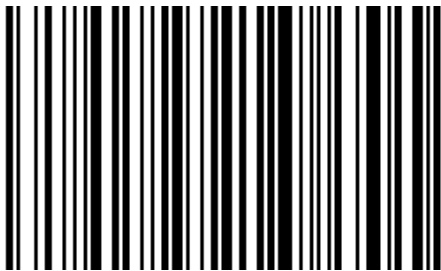

UK Postal ON (Default)

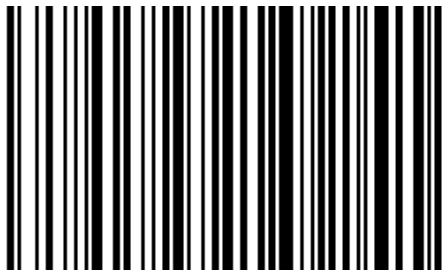

UK Postal OFF



Japan Postal ON (Default)



Japan Postal OFF




Australia Post ON (Default)



Australia Post OFF



Netherlands KIX Code ON (Default)

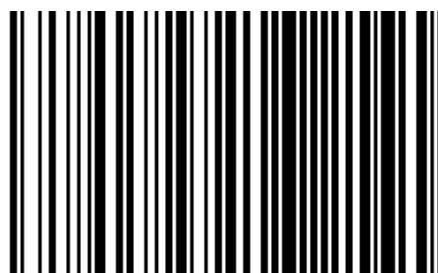


Netherlands KIX Code OFF



USPS 4CB OFF (Default)




USPS 4CB ON

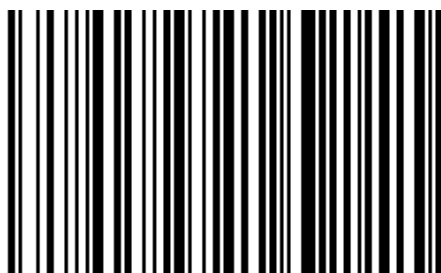


UPU FICS Postal OFF (Default)




UPU FICS Postal ON

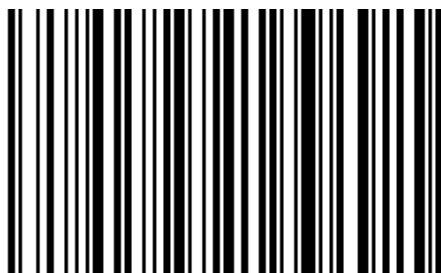


GS1 DataBar-14 ON (Default)

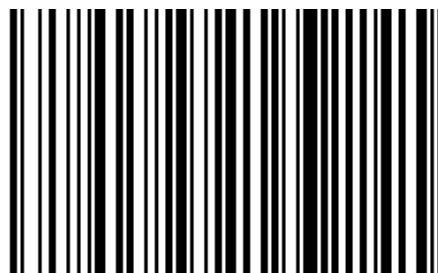


GS1 DataBar-14 OFF

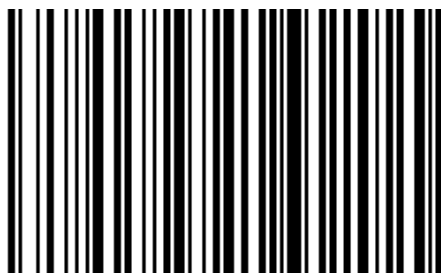

GS1 DataBar Limited OFF (Default)

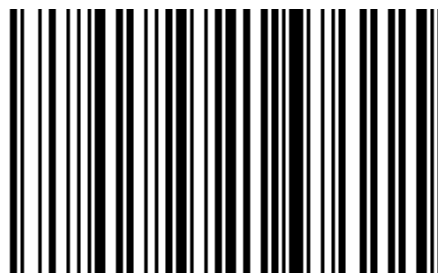


GS1 DataBar Limited ON

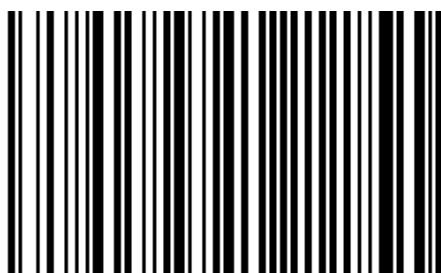

**GS1 DataBar Expanded OFF
(Default)**




GS1 DataBar Expanded ON

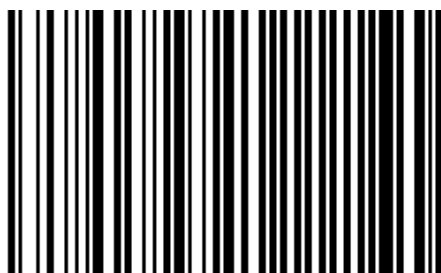


Composite CC-C OFF (Default)




Composite CC-C ON

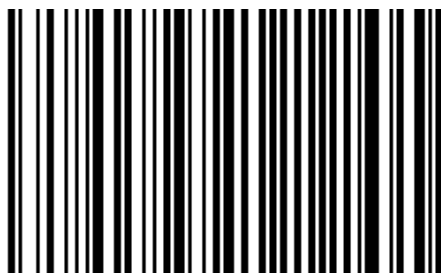

Composite CC-A/B OFF (Default)

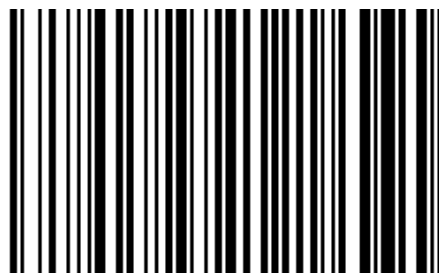


Composite CC-A/B ON

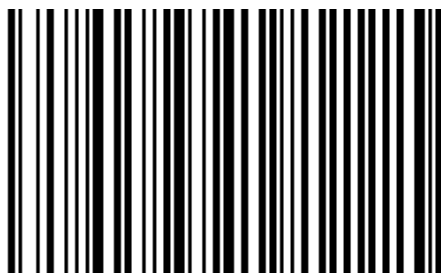

Composite TLC-39 OFF (Default)



Composite TLC-39 ON

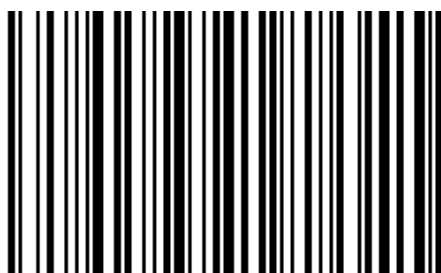

PDF417 ON (Default)



PDF417 OFF



MicroPDF417 ON (Default)



MicroPDF417 OFF



Data Matrix ON (Default)



Data Matrix OFF



Maxicode ON (Default)




Maxicode OFF



QR Code ON (Default)




QR Code OFF

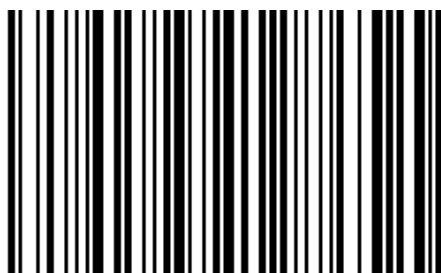

Micro QR ON (Default)




Micro QR OFF

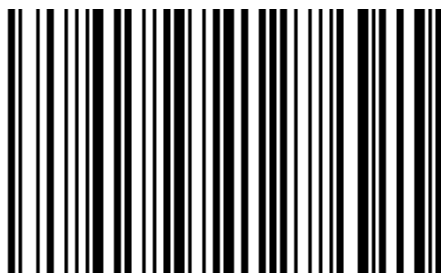

Aztec ON (Default)




Aztec ON (Default)

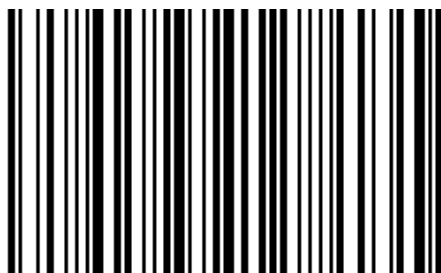


Han Xin ON (Default)



Han Xin OFF

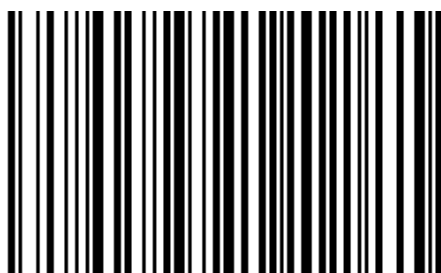

EAN-8 JAN-8 Expand OFF (Default)

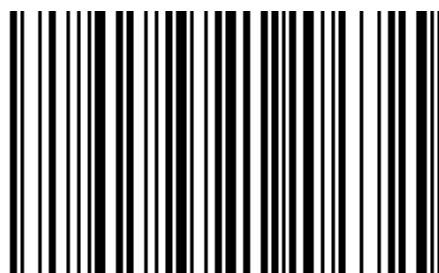

EAN-8 JAN-8 Expand ON




Code 32 ON (Default)




Code 32 OFF




Code 39 Full ASCII ON (Default)

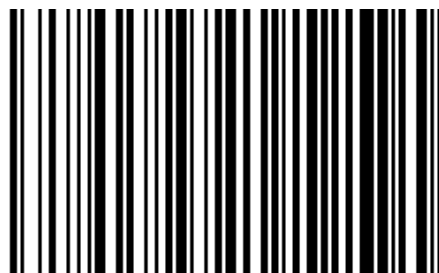


Code 39 Full ASCII OFF

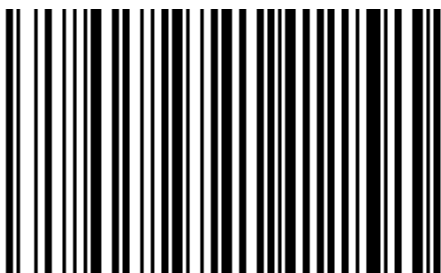


UCC Coupon Extended OFF (Default)

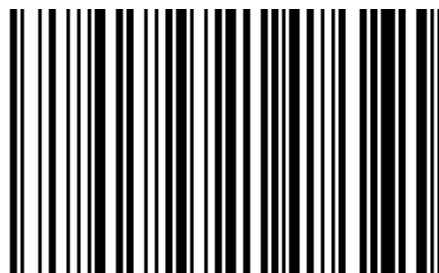


UCC Coupon Extended ON

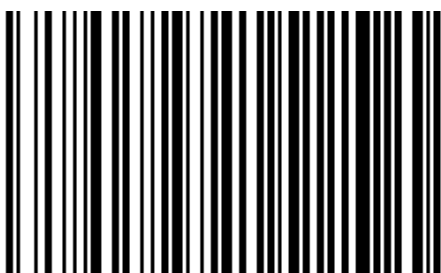


Codabar Prefix Disable (Default)

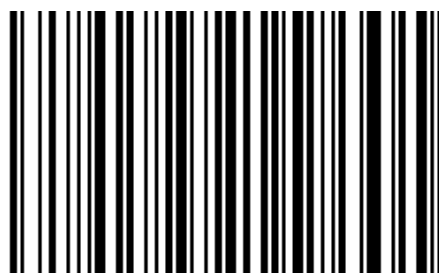

Codabar Prefix Enable

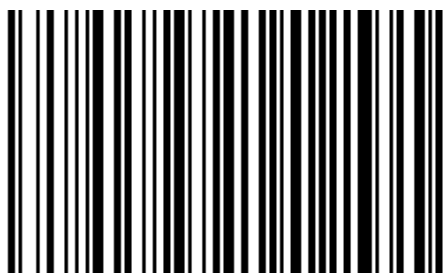

Code 32 Prefix Disable

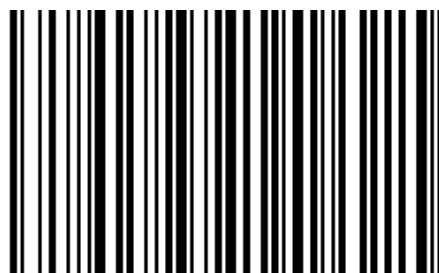

Code 32 Prefix Enable (Default)



Code 128 FNC4 ON



Code 128 FNC4 ON